
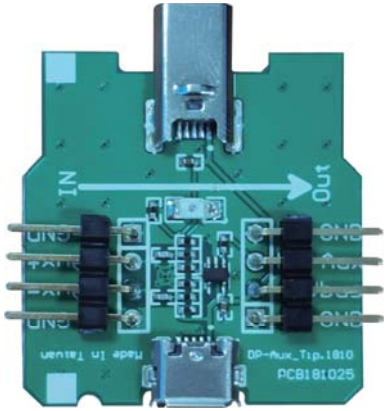


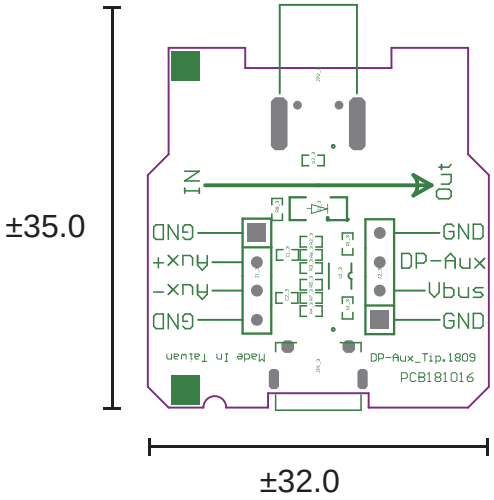

NOTE:

1. Powered by the Micro USB port, Vbus=5V (an Micro USB cable is needed but not included).
2. Can be cascaded as multi cards.
3. Does not support Fast AUX (FAUX).

Acute® PC-based T&M Instruments 皇晶科技股份有限公司 Acute Technology Inc.	DESCRIPTION: DP_Aux Differential signal adaptor	UNIT: mm	Tel:886-2-2999-3275 Fax:886-2-2999-3276 www.acute.com.tw
	PART NO: AC033	DATE: 2022.09.22	